

2-POST LIFT

**APS
SYSTEM**

**NORTEC
PRO>>>**
CE

TECHNICAL DATA:

CAPACITY:	4000 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,2 kW
LIFTING HEIGHT:	1800 mm
TOTAL HEIGHT:	2826 mm
CLEARANCE:	2830 mm
2-STAGE ARMS:	715 -1050 mm
3-STAGE ARMS:	810 -1500 mm
OIL PRESSURE:	16 MPa
NOISE LEVEL:	<80 dB
WEIGHT:	620 kg
EAN CODE:	5904954685427

PD4000ST



DIMENSIONS FOR SHIPPING:
L. 295 x W. 60 x H. 100 cm

DESCRIPTION

Low threshold – maximum functionality, zero restrictions

Mechanical synchronization – perfect lifting level

Electromagnetic lock – safety at every stage


Automatic arm lock – full control without effort

Door and sill protection – rubber pads included

APS SYSTEM – lowering without pre-lift!


Adjustable adapters – universal fit: passenger cars and vans

LIFT AND ARMS DIMENSIONS

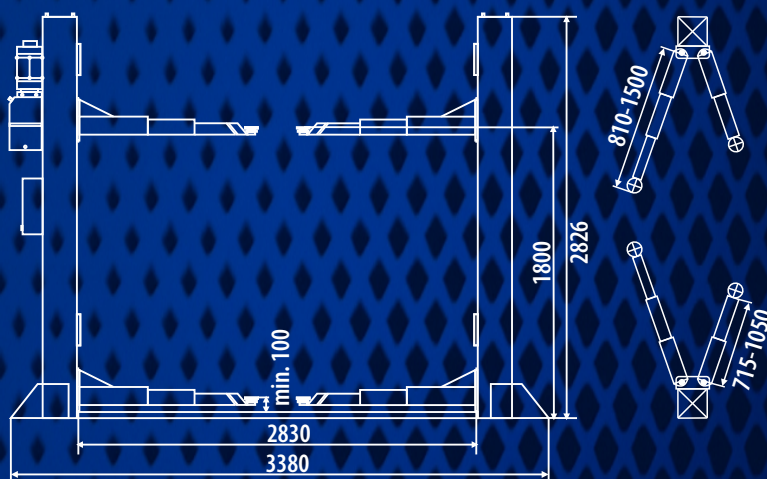




2 and 3 STAGE ARMS

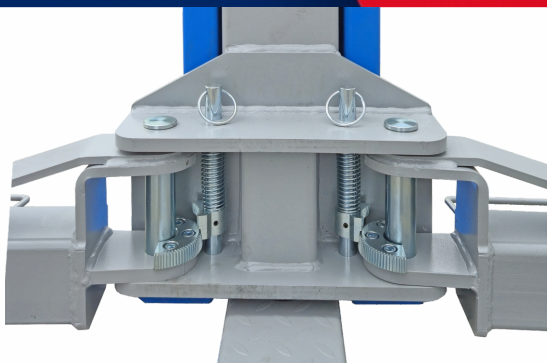

AUTOMATIC ARM LOCK

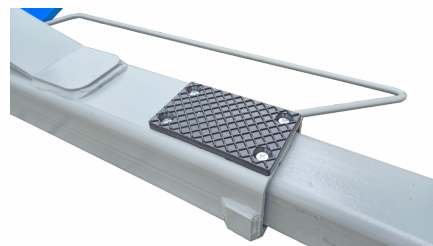

THRESHOLD PROTECTION



LOW PASSAGE THRESHOLD



PNEUMATIC CONNECTOR




PUMP AT TOP OF COLUMN




CONTROL BOX
WITH 230V SOCKET



Initial lifting
to unlock the latches,
then downward travel.



APS = possibility of lowering without preliminary lifting



Direct
downhill ride.

FLOOR REQUIREMENTS



1,5 x 4,2 m
x 30 cm



Tolerance
max ± 5 mm



Concrete class
C25/30



Maturing time:
28 days
(fresh pour)



Homogeneous slab,
without expansion joints



Chemical M16/190

SUPPORTED VEHICLES



Small



Mediocre



Limousine
Suv



Delivery
short



Delivery
long



Special
vehicles

✓ Supported
✗ Unsupported