


MO320 PREMIUM

TECHNICAL DATA:

SUPPLY:	400V/50Hz
MOTOR POWER:	0,75 kW
PNEUMATIC SUPPLY:	8-12 bar
EXTERNAL RIM RANGE:	11" - 21"
INTERNAL RIM RANGE:	13" - 24"
BEAD BREAKER FORCE:	2500 kg
MAX. WHEEL DIAMETER:	1150 mm
MAX. WHEEL WIDTH:	13"
NOISE LEVEL:	<70 dB
WEIGHT:	300 kg

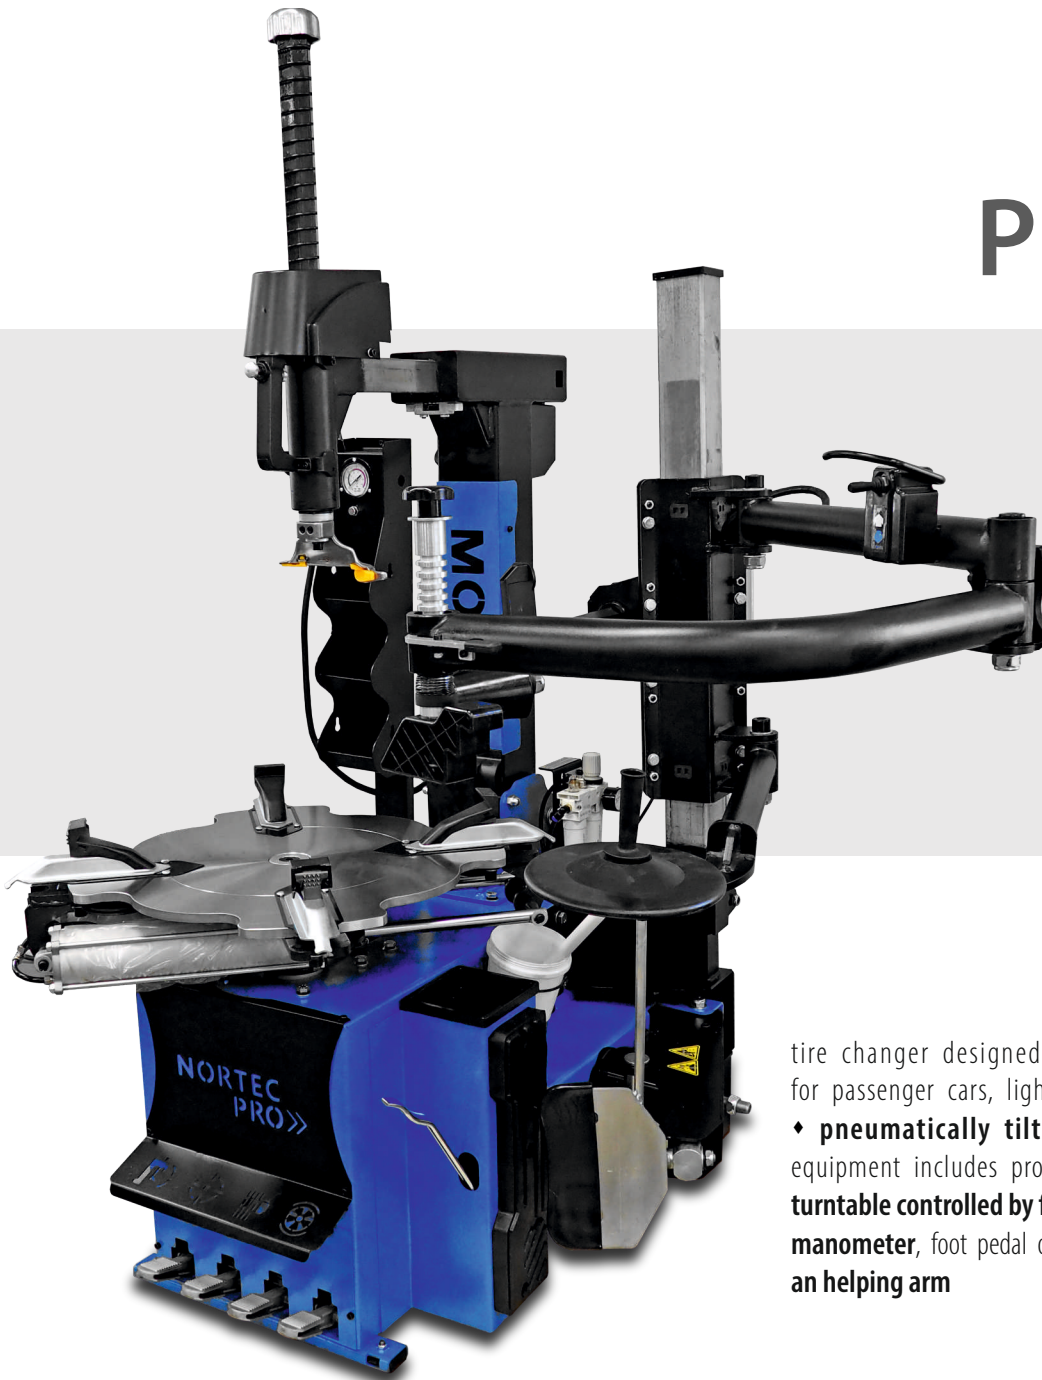

tire changer designed for mounting and dismounting tires for passenger cars, light commercial vehicles, and motorcycles
 ♦ **pneumatically tilting and locking column** ♦ standard equipment includes protective mounting inserts ♦ **two-speed turntable controlled by foot pedal** ♦ inflation gauge with **integrated manometer**, foot pedal operated ♦ **standard equipment includes an helping arm**



**PNEUMATICALLY TILTING COLUMN
AND LOCKABLE HEAD**




**FOOT PEDAL-CONTROLLED
WHEEL INFLATION SYSTEM**



**PRESSURE GAUGE WITH MANOMETER
FOR INFLATION**



**TWO TURNTABLE ROTATION SPEEDS
CONTROLLED BY FOOT PEDAL**

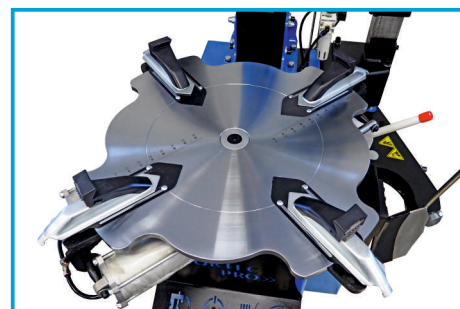

**PROFILED TABLE MADE
OF HIGH-STRENGTH STEEL**




**AIR PREPARATION UNIT INCLUDED
AS STANDARD EQUIPMENT**




PRESSING ROLLER OF THE HELPING ARM



**PNEUMATICALLY CONTROLLED
HELPING ARM**

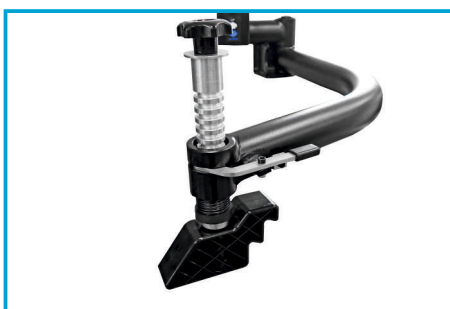

**HELPING ARM PRESSURE
WITH HEIGHT ADJUSTMENT**

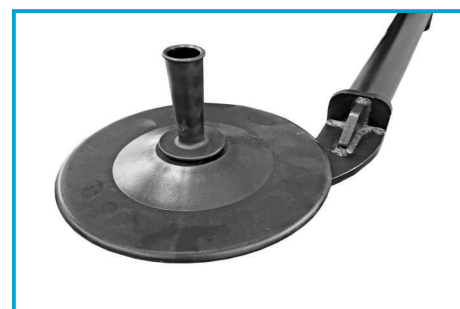

**HELING ARM PLATE ASSISTING
IN TIRE MOUNTING/DISMOUNTING**